




## CAD MODEL




## PROFILES

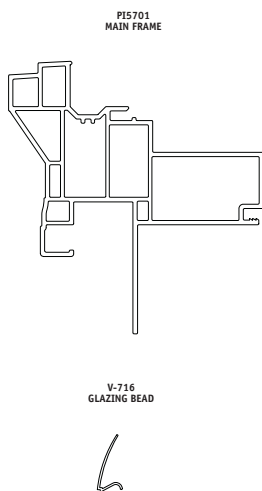

## FEATURES and BENEFITS

- All welded frame
- Integral Nail Fin and J Channel
- J channel designed with Brick Mold accents
- Aesthetically pleasing exterior frame design
- Full complement of accessory profiles
- Interior glazed
- Maximum glass thickness of 3/4"
- Multi chambered vinyl profiles for thermal efficiency
- DP50 performance levels
- Full Family of products (Hung, Slider, and Picture window(s))
- Pinnacle lamination available

## ASSEMBLY DRAWING

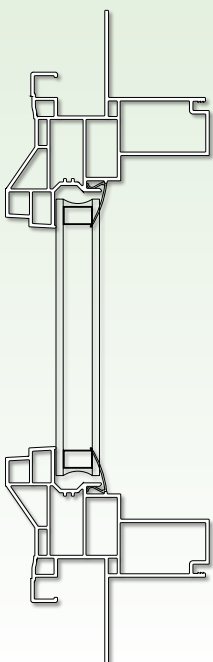

## MANUFACTURING LIMITATIONS

| BASELINE PERFORMANCE      |                          |         |
|---------------------------|--------------------------|---------|
| Thermal Insulation        |                          |         |
| GLASS                     | Uc Value                 | R Value |
| LoE Argon                 | 0.27                     | 3.70    |
| Double LoE Argon          | 0.23                     | 4.35    |
| Structural Performance    |                          |         |
| Air Infiltration @ 25 mph | 0.01 cfm/ft <sup>2</sup> |         |
| Water Penetration         | 7.50 psf                 |         |
| Uniform Loads             | +/-75.00 psf             |         |

**AAMA RATING:R-PG50 72x72-FW**

